


LED Troffer Fixture (New Construction)

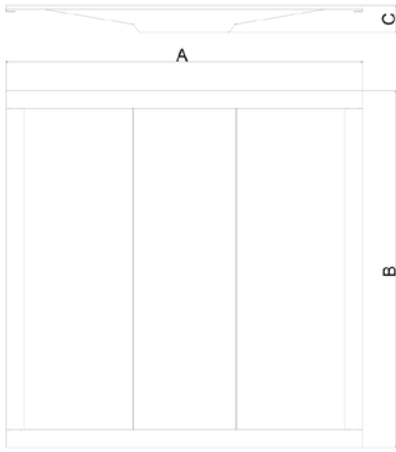

Maximum overall	A	B	C
2*	603mm	603mm	45mm
2*4ft	603mm	1213mm	45mm

FEATURES

- Input voltage: AC100-277V
- Operating frequency: 50/60Hz
- Power factor: > 0.95
- Ambient temperature range: -20°C ~+45°C
- Color Temp: 3000K~5000K
- Dimmable: 3-in -1 dimming
- THD: <10%
- IP Rating: IP40
- CRI: >Ra80
- Beam angle: 120°
- Cloud series led troffer gives >130lm/W
- 5 years' warranty

APPLICATIONS

- Office, meeting room, school, hospital, shops, hotel, exhibitions, supermarket and so on.



PARAMETER

Length	Product code	Certification	Wattage	Function	3000 - 5000K	Packing / Carton	G.W./ carton
2*2 FT	ZS-TF2*2-Q01-F30-CC	ETL,FCC,CE	30W	3-in-1 dimming(0-10V;PWM;Rx)	3900 LM	650*130*650mm 2 pcs 1*40HQ Loading = 2592pcs	8kg
	ZS-TF2*2-Q01-F40-CC	ETL,DLC,FCC,CE	40W	3-in-1 dimming(0-10V;PWM;Rx)	5200 LM		
	ZS-TF2*2-Q01-F50-CC	ETL,FCC,CE	50W	3-in-1 dimming(0-10V;PWM;Rx)	6500 LM		
2*4 FT	ZS-TF2*4-Q01-F40-CC	ETL,FCC,CE	40W	3-in-1 dimming(0-10V;PWM;Rx)	5200 LM	1260*130*650mm 2 pieces 1*40HQ Loading = 1332pcs	14kg
	ZS-TF2*4-Q01-F50-CC	ETL,DLC,FCC,CE	50W	3-in-1 dimming(0-10V;PWM;Rx)	6500 LM		
	ZS-TF2*4-Q01-F55-CC	ETL,FCC,CE	55W	3-in-1 dimming(0-10V;PWM;Rx)	7150 LM		